
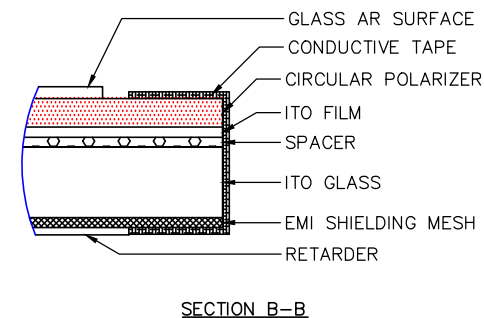
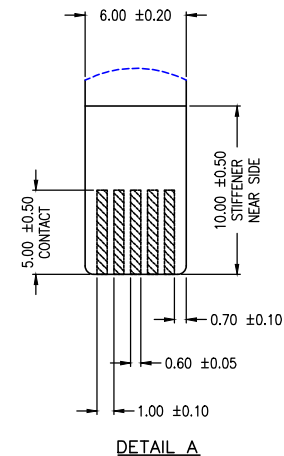
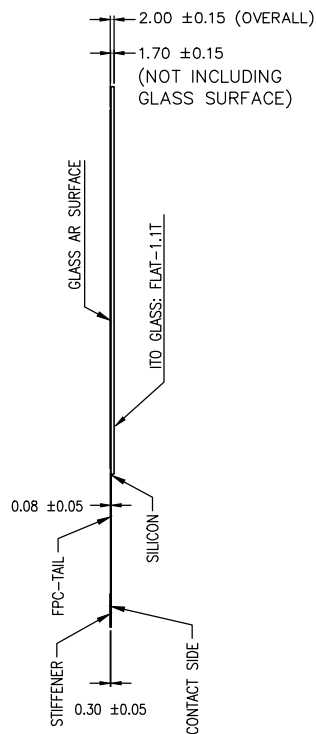


UNITS: MM

Rev. A 10-21-2010

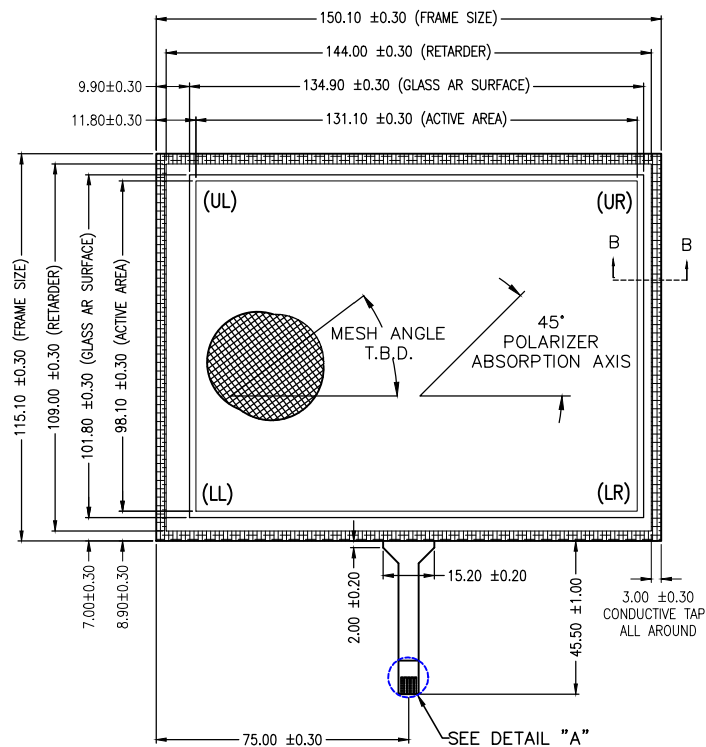

PIN ASSIGNMENT	
PIN POSITION	DESIGNATION
1	UL
2	LL
3	SENSE
4	LR
5	UR
6	-
7	-
8	-

MATERIAL CHARACTERISTICS	
PROPERTY	SPECIFICATION
SURFACE TREATMENT	CLEAR
OVERALL THICKNESS	2.00 MM
LIGHT TRANSMISSION	> 68 %
OPERATION TEMPERATURE	-30~70°C
STORAGE TEMPERATURE	-50~70°C
OPERATING HUMIDITY	20~90%RH
STORAGE HUMIDITY	20~90%RH
SURFACE HARDNESS	≥7H

ELECTRICAL CHARACTERISTICS	
PROPERTY	REQUIREMENT
TYPE	ANALOG RESISTIVE 5 WIRE
LINEARITY	Max. 1.5 %
X(3.4 PIN)RESISTANCE	-
Y(5.8 PIN)RESISTANCE	-
INSULATION RESISTANCE	20 MΩ (DC 25V)



Advanced Link Photonics, Inc.

TUSTIN, CALIFORNIA U.S.A.

TOLERANCES: ANGULAR: ± 5° X.XX: ± 0.10 X.XXX: ± 0.05 UNLESS OTHERWISE SPECIFIED		TITLE 6.5" TOUCH PANEL	
DRAWN: P. CHIANG		DWG. NO. 7065P5Z06R131X	
CHECKED:		REF. NO.	RSP. NO. TRIG-TR5-065
APPROVED:		Rev. A	SCALE: NOT TO SCALE
		SHEET: 1 of 1	

THIS DRAWING IS CONFIDENTIAL AND PROPRIETARY AND IS THE PROPERTY OF ADVANCED LINK PHOTONICS INC. IT IS NOT TO BE DISCLOSED TO ANY PARTY, REPRODUCED OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONSENT OF THE SAID COMPANY.